



since 1905

TAG-ALONG SERIES

21 TON CAPACITY



SOME OPTIONAL EQUIPMENT
MAY BE SHOWN.

ROGERS® has two 21-ton models in the Tag-Along Series. Both have the variety of features that will make your job safer and easier. Choose from either the **TAG21XL** and its 22'-0" level deck, or the **TAG21XXL** and its 24'-0" level deck. In these Tag-Alongs, ROGERS' superior construction means trouble-free service and dependable operation.

STANDARD FEATURES




- **Longer drawbar & premium landing gear:** Longest drawbar in the industry makes for better load distribution and easy handling. 1/2" safety chains are integral to the frame of the trailer, not welded in place. The two-speed landing gear has 50,000 lb. lift capacity and 70,000 lb. static capacity. The pintle eye adjusts to accommodate various heights using standard shop tools. There is ample room for chain and tool storage in the drawbar toolbox with lockable steel lid.



- **Unitized frame construction:** Main carrying members are constructed with high strength 14-inch deep wide flange beams. Four- and six-inch deep cross members are pierced through the main beams for a lower deck height and stronger frame - no knee braces or stacked cross members. Side channels have complete bottom flange, no cut-away area over the tires. Full 1-3/4" air-dried oak deck is fastened to the trailer frame with bolts and cupped deck washers. Multi-leaf four-spring suspension provides a stable ride. Both axles have spring brakes and a premium 4S/2M anti-lock braking system.




- **Extra-long loading ramps with 72" beavertail at 8° slope:** Constructed from high-strength 50,000 psi minimum yield steel, these ramps are strong and durable yet lightweight for easy operation. Dual springs assist the operator lifting the ramps off the ground as well as off the deck. The ramps can be easily adjusted laterally to handle machines of various widths. Extra length reduces the climb angle for safer loading. These "E-Z Flip" ramps are standard oak-covered or optional ladder style.

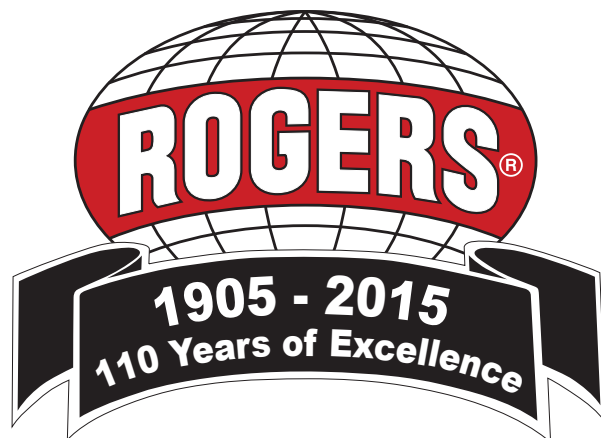

THE ULTIMATE IN TRAILERS®
ROGERS BROTHERS CORPORATION
www.rogerstrailers.com

The name you know, experience you can trust and the performance to back it up.

21 TON TAG-ALONG • TAG21XL and TAG21XXL

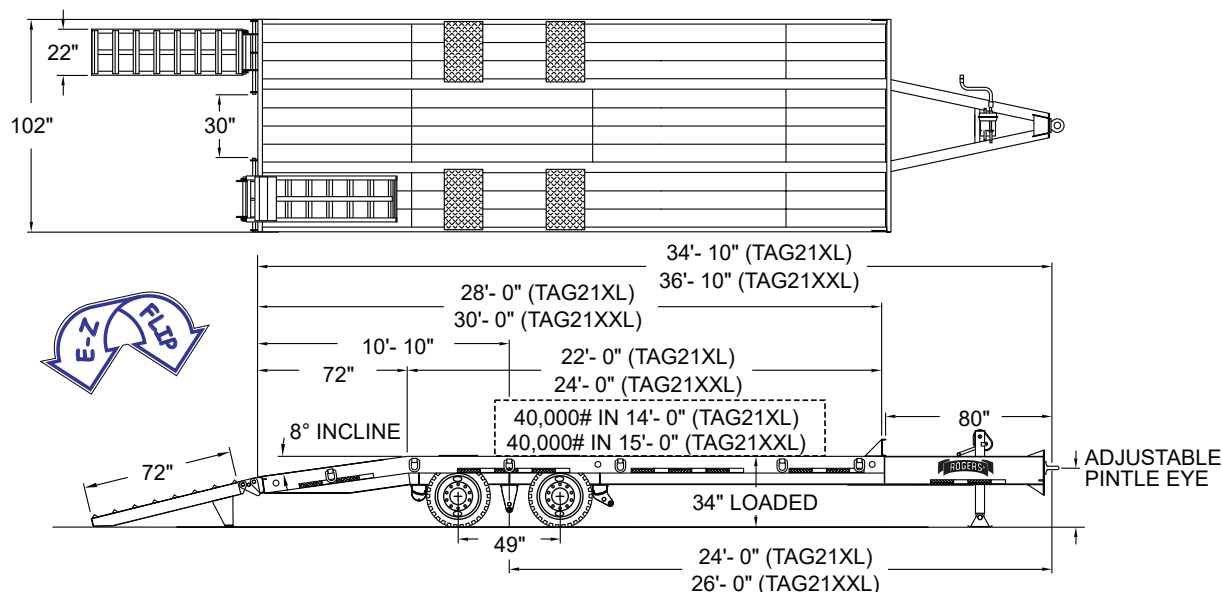

SPECIFICATIONS	MAXIMUM STRUCTURAL CAPACITY	SUSPENSION	AXLES	TIRES	WHEELS & HUBS/DRUMS	AIR BRAKES	LANDING GEAR	EMPTY WEIGHT	GROSS VEHICLE WEIGHT RATING (GVWR)	GROSS AXLE WEIGHT RATING (GAWR)
	21 TONS TAG21XL IN 14'-0" TAG21XXL IN 15'-0"	MULTI-LEAF SPRING CAPACITY: 44,800 LB	5" ROUND CAPACITY: 22,500 LB @ 60 MPH	235/75R17.5(H) LOW PROFILE TUBELESS RADIAL CAPACITY: 22,700 LB/AXLE	17.5" x 6.75" HUB-PILOTED 8-HOLE STEEL DISC WHEELS ON 12 1/4" x 7 1/2" DRUM	RISE "S" CAM STYLE 4S/2M ABS W/SPRING PARKING BRAKES	TWO-SPEED WITH SWIVEL FOOT STATIC LOAD: 70,000 LB	TAG21XL 8,910 LB TAG21XXL 9,410 LB	TAG21XL 50,910 LB TAG21XXL 51,410 LB	21,420 LB @ 60 MPH

STANDARD FEATURES

- TAG21XL has 22'-0" platform deck.
- TAG21XXL has 24'-0" platform deck.
- Six-position pintle eye with 66,000 lb. tow capacity.
- Drawbar toolbox with steel lid.
- Twelve (12) standard lashing D's - six (6) per side
- Oak-covered 6'-0" beavertail with 8° slope.
- Oak-covered "E-Z Flip" rear loading ramps, 72" x 22" laterally adjustable, 50,000 lb. minimum yield steel.
- LED Lights: US DOT 12-volt rubber grommet mounted.
- Sealed wiring system with 7-wire socket.
- Epoxy primer; ROGERS Red or Black enamel finish.

OPTIONAL EQUIPMENT

- Double landing gear package.
- Additional lashing D's.
- Spare tire carrier.
- Ladder-style "E-Z Flip" rear loading ramps, 72" x 22" laterally adjustable, 50,000 lb. minimum yield steel.
- Hydraulic rear ramps.
- Aluminum disc wheels.
- Mechanical backup warning alarm.
- Rubber composite material decking.
- Other ROGERS paint colors available.



...since 1905

ROGERS BROTHERS CORPORATION

100 Orchard Street
Albion, Pennsylvania, 16401
(800) 441-9880
(814) 756-4121
(814) 756-4830 FAX
www.rogerstrailers.com