



# TAG-ALONG SERIES

## 25 TON CAPACITY



SOME OPTIONAL EQUIPMENT MAY BE SHOWN.

The ROGERS® Tag-Along Series includes this 25-ton capacity drawbar trailer - **TAG25XXL**. Superior construction is evident in the high strength steel beams and integrated frame design. Better load distribution and extra-long loading ramps mean safer and easier operation.

### STANDARD FEATURES




■ **Premium landing gear, longer drawbar:** The heavy-duty two-speed landing gear has 50,000 lb. lift capacity and 70,000 lb. static capacity. The longest drawbar in the industry makes for better load distribution. ½" safety chains are integral to the frame of the trailer, not welded or bolted in place. Pintle eye is adjustable to four different heights using regular shop tools. Ample storage space is available in the drawbar toolbox with a lockable steel lid.



■ **Unitized Frame Construction:** High strength 14" deep main beams include full bottom flange on the beavertail. Cross members are 6" deep and are pierced through the main beams for a lower deck height and stronger frame. Side channels have complete bottom flange, no cut-away area over the tires. Multi-leaf six-spring suspension provides a smooth stable ride. Each axle has spring brakes and a premium 4S/2M anti-lock braking system.



■ **Extra-long ramps, safer loading:** Constructed from high strength 50,000 psi minimum yield steel, these "E-Z Flip" ramps are strong and durable yet lightweight for ease of operation. They adjust laterally to accommodate loading machines of various widths. Dual springs assist lifting off the ground as well as off the beavertail. Available in standard oak-covered or optional ladder style.

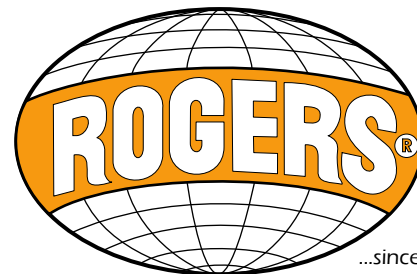

...since 1905


**THE ULTIMATE IN TRAILERS®**

**ROGERS BROTHERS CORPORATION**

[www.rogerstrailers.com](http://www.rogerstrailers.com)

*The name you know, experience you can trust and the performance to back it up.*

# 25 TON TAG-ALONG • TAG25XXL

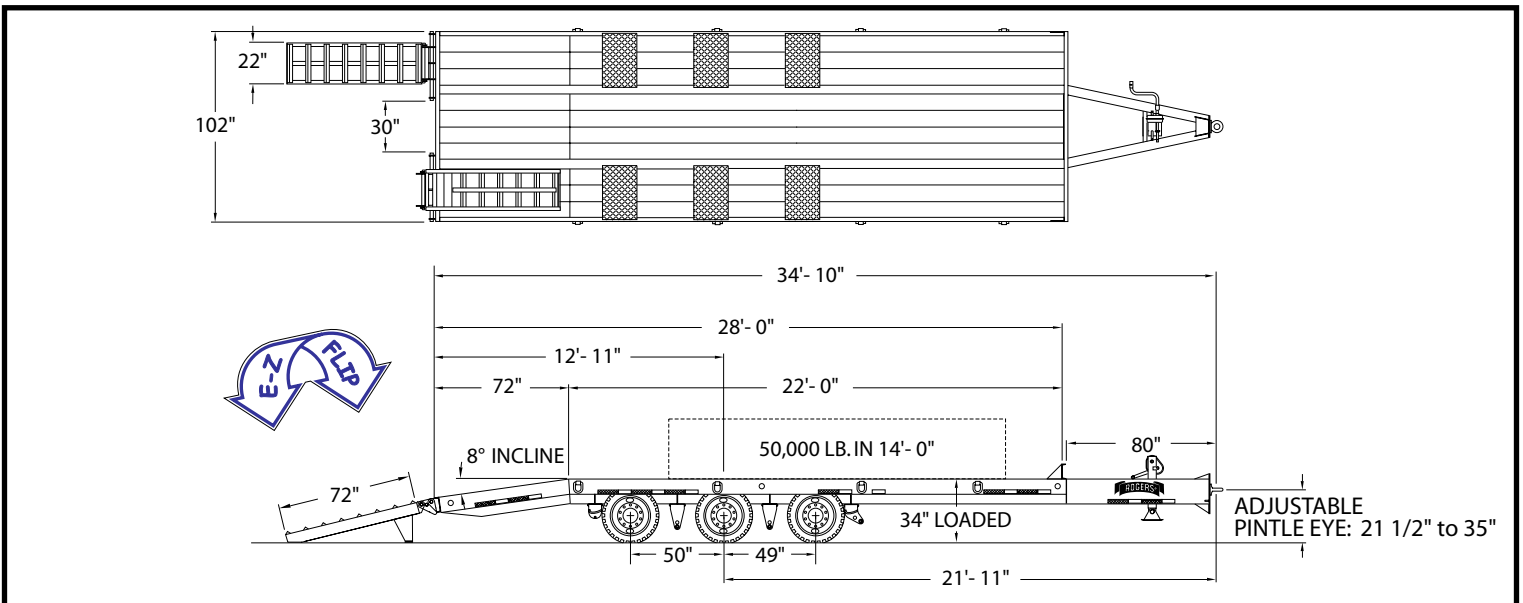

SPECIFICATIONS	Maximum Structural Capacity	Suspension	Axles	Tires	Wheels & Rims	Air Brakes	Landing Gear	Empty Weight	Gross Vehicle Weight Rating	Gross Axle Weight Rating
	25 tons in 14'-0" of the deck	Multi-leaf six-spring Capacity: 67,200 lbs	5" round Capacity: 22,500 lb @ 60 mph	215/75R17.5 low-profile tubeless radial Capacity: 18,160 lb	17.5" x 6.75" hub-piloted 8-hole steel disc wheels on 12 1/4" x 7 1/2" drum	Rising "S" cam style 4S/2M ABS with spring parking brakes	Heavy-duty Two-speed with swivel foot Static load: 70,000 lb	10,880 lb.	60,880 lb.	18,160 lb @ 60 mph

## STANDARD FEATURES

- Four-position pintle eye with 66,000 lb. tow capacity.
- Drawbar toolbox with steel lid.
- Eight (8) standard lashing D's.
- Oak-covered 6'-0" beavertail with 8° slope.
- Oak-covered "E-Z Flip" rear loading ramps, 72" x 22" laterally adjustable, 50,000 lb. minimum yield steel.
- LED Lights: US DOT-approved 12-volt rubber-mounted with sealed wiring and 7-wire socket.
- Epoxy primer; ROGERS Red or Black enamel finish.

## OPTIONAL EQUIPMENT

- Double landing gear package.
- Additional lashing D's.
- Spare tire carrier.
- Ladder-style "E-Z Flip" rear loading ramps, 72" x 22" laterally adjustable, 50,000 lb. minimum yield steel.
- Hydraulic ramps.
- Aluminum disc wheels.
- 235/70R17.5 tires.
- Mechanical backup warning alarm.
- Other ROGERS paint colors.



...since 1905

## ROGERS BROTHERS CORPORATION

100 Orchard Street  
 Albion, Pennsylvania, 16401  
 (800) 441-9880  
 (814) 756-4121  
 (814) 756-4830 FAX  
[www.rogerstrailers.com](http://www.rogerstrailers.com)

In keeping with our policy of constant improvement, the designs, materials, and specifications are subject to change without notice or penalty. Capacity ratings are frame ratings only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) and/or state and federal regulations.