



ULTIMA™ SERIES

35 TON CAPACITY



SOME OPTIONAL EQUIPMENT MAY BE SHOWN.

The ROGERS® CR35PL 35-ton capacity detachable gooseneck is packed with features to make your job easier and safer. Each CR35PL is manufactured to superior quality standards that provide the longest life cycle in the industry. The CR35PL is simple, economical, and trouble-free.

STANDARD FEATURES



■ **Convenient 30° ramp incline** gives easy access to the rear frame. Spring brakes on both axles improve loading safety. Extra-wide trunnion beams give a solid parking spot. The extra-wide "boom well" combine with the 23" loaded deck for an ideal transport height for taller equipment. Mechanical control adjusts the deck height six positions.

■ **Severe-duty, unitized frame** with mainbeams fabricated of 100,000 PSI steel - the strongest in the industry. Heavy-duty, full-width cross members on 30" centers for increased deck life. Full 2" air-dried oak decking installed with carriage bolts and washers for easy replacement. Heavy-duty swinging, removable cast side brackets widen the deck to 10'-6". Tested and certified D-rings exceed today's load securement regulations. Axles with 4S/2M ABS provide optimum stopping capability.



■ **Exclusive Croucher® 7" front with tapered beams** hugs the ground for optimal loading stability and approach angle. Concealed, flush deck hooks won't damage low ground clearance equipment. Front loading ramps are available in self-leveling style, or Rogers exclusive sliding ramps that adjust from 32" in-to-in to 114" out-to-out. Powerful, low operating pressure No Foot® self-lifting gooseneck saves time and effort by easily lifting the rated load on any terrain and permits quick deck height adjustment to clear obstructions. Equipment can ride over the scraperneck gooseneck to maximize deck length.




...since 1905

THE ULTIMATE IN TRAILERS

ROGERS BROTHERS CORPORATION

100 Orchard Street Albion, Pennsylvania 16401
Phone (814) 756-4121 Fax (814) 756-4830
Toll Free (800) 441-9880
www.rogerstrailers.com

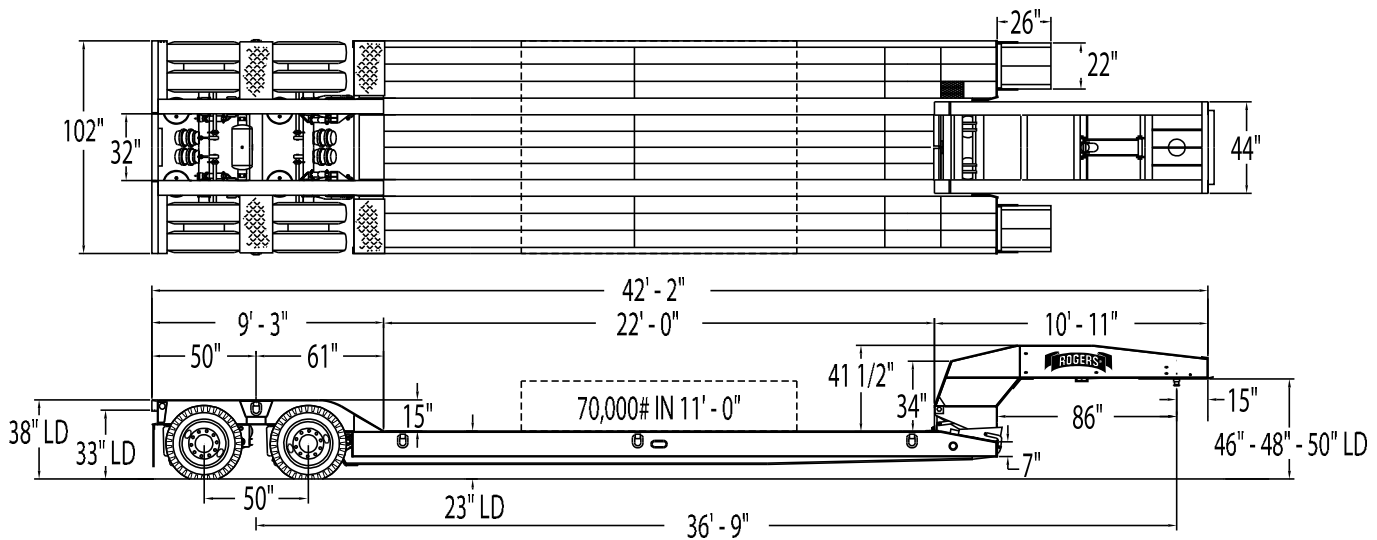

SPECIFICATIONS	Maximum Structural Capacity	Suspension	Axles	Tires	Wheels & Rims	Air Brakes	Gooseneck Hydraulics	Empty Weight	Gross Vehicle Weight Rating	Gross Axle Weight Rating
	35 tons in 11'-0" of the deck	Heavy-duty air ride with mechanical height control Capacity: 50,000 lb	5" round Capacity: 25,000 lb @ 60 mph	255/70R22.5 (H) 16 PR low-profile tubeless radial Capacity: 20,280 lb	22.5" x 8.25" steel disc wheels on hub-piloted hub & drum oil bath bearings, 16 1/2" x 7" drum	Rising "S" cam style 4S/2M ABS with spring parking brakes	Max. Pressure: 2,000 psi Max. Flow: 20 gpm	14,800 lb	84,800 lb	20,280 lb @ 60 mph 25,000 lb @ 20 mph

STANDARD FEATURES

- 22' x 102" platform deck with 23" loaded height.
- Severe-duty, unitized frame with cross members on 30" centers.
- Hydraulic gooseneck jack paddle and shoe.
- "Security Link" keeps gooseneck in position for easy reconnection to tractor.
- Side channel reinforcing the first 6'-0" of deck.
- Twenty (20) bearings only, for optional side brackets.
- Ten (10) D-rings.
- Full 2" air dried oak decking.
- 50,000# air suspension with mechanical height control.
- Extra-wide trunnion beams between wheels.
- ABS: 4S/2M premium system.
- US DOT-approved 12 volt, rubber-mounted, sealed beam lights with weather resistant modular wiring system and SAE J560 7-wire socket.
- Corrosion resistant undercoating for trailer subframe.
- Moisture-cured urethane primer.
- Standard Finish - RBC Red.

OPTIONAL EQUIPMENT

- 98" and 110" swing radius.
- Gooseneck fenders.
- 13 HP gas engine power unit.
- Hydraulic trapdoors.
- Self-adjusting front folding ramps.
- Sliding front folding ramps.
- Center boards (installed or loose).
- Side channel reinforcing.
- Twenty (20) removable swinging side brackets.
- Removable 3rd axle.
- 1/4" smooth plate reinforced wheel covers with grouser bars.
- Aluminum disc wheels.
- 275/70R22.5 (H) 16 PR low profile tires.
- L.E.D. light package.
- US DOT-approved safety light system with 12v deep cycle battery.
- Back-up warning alarm.

The name you know, experience you can trust and the performance to back it up.



ROGERS BROTHERS CORPORATION

100 Orchard Street
Albion, Pennsylvania, 16401
(800) 441-9880
(814) 756-4121
FAX (814) 756-4830
www.rogerstrailers.com